

The information in this catalogue is subject to change without notice. The information and diagram in this catalogue reflect the technical features and configuration of the elevator model at press time (refer to the version number). In line with the principle of continuous development of products, our company reserves the right to change the selection of product technical parameters and colour at any time. The existing image technology cannot accurately reproduce the elevator component structure and decoration colour. Therefore, this catalogue only provides general information, not as a contract document. The specific configuration parameters are subject to the formal agreement.

If you need detailed information, please contact us.

HITACHI Inspire the Next VGE Series Home Elevator



# SAFETY & COMFORTABLE

Hitachi home elevators with safety protection designs supported by intelligent technology to ensure that passengers enjoy a comfortable vertical transportation experience.



Low Torque Ripple



Temperature Rise Control



High Braking Torque



Superior IP Rating



Class-F





#### **Seamless Communication**

- Telephone line interface is provided
- o Enable passenger to communicate with external



### **Intelligent Auxiliary Brake**

- Fast! When motor overspeed is detected, auxiliary brake is activated immediately
- Effective! Speed can be effectively reduced before the brake is applied, which is conducive to rapid stopping



#### **Power Failure Emergency**

- In the event of power failure, the car emergency lighting will be lighted up automatically
- Elevator powered by the automatic rescue device (ARD) will run to the nearest service floor at slow speed, levelled and stop at the landing with door open for the passengers to leave



### **Pit Flood Operation**

- When there is water ingress in the pit, the elevator will travel up to the evacuation floor and open the door for the passengers to leave
- The elevator resume normal operation after the float switch is manually reset

# **ULTIMATE HUMANISATION**

Humanised design with function configured, giving every ride a thoughtful experience.

### **Multi-Beam Protection**

- o Prevents passengers from getting caught when entering and exiting the elevator
- o Protects elevator doors from damage caused by collisions

### **Highly Distinctive Characters**

- High distinctive floor characters
- o Golden ratio 3:5 (width:height) font proporation
- o Adopt regular circular curves, full form characters
- o Easy-to-read wide-open design

23569

23569 Normal characters









- Automatic detection of inoperative button
- Effectively process the malfunction button without affecting elevator operation

## **Load Sensing System**

- Intelligent starting torque compensating algorithm
- Contactless weighing technology

### **Flexible Inter-Floor Operation**

- Based on the distance between inter-floor with flexible control to achieve step-less speed
- Efficient operation with excellent riding comfort

### **Double-Layer Car Platform**

- o Welding-less high-precision technique
- Integrated load-bearing parts
- o Double-layer car platform base

# HEALTH & COMFORTABLE

Hitachi home elevators developed various designs to address customer concerns about installation, energy consumption, noise and hygiene, providing customers with a comfortable and healthy living experience.

### Compact And Flexible Design

- Compact machine design
- Variety of specifications are available

# Energy Efficiency Design

- Lightweight, gearless machine
- o Automatic standby mode reduce energy consumption
- Suitable for 220V household power supply (For 24m/min)

## Antibacterial Button\*

- By adding highly efficient antibacterial ions to the button surface, residual bacteria on the buttons can be effectively suppressed
- Antibacterial buttons have been certified by SGS, with an antibacterial rate of over 99% against Escherichia coil and Staphylococcus aureus



# CAR DESIGN

CM19-43

Standard



Applicable i	ated load	320kg,400kg	
Car ceiling		RF-063	
	Painted steel_YM24 (Champagne gold)		
		LED lighting	
Bare ceiling height 2200mm		2200mm	
False ceiling height 2200mm		2200mm	
Car door	Painted steel_YM	24 (Champagne gold)	
Side walls	Painted steel_YM	24 (Champagne gold)	
Car floor		S-693 Vinyl flooring	

C15-62






Applicable rated load 320kg .4	
Painted steel_YM24	RF-019 4 (Champagne gold) LED lighting
Bare ceiling height 2200mm	
False ceiling height 2200mm	
Painted steel_YM24	4 (Champagne gold)
Painted steel_YM2	4 (Champagne gold)
	S-693 Vinyl flooring
	Painted steel_YM2- height p height Painted steel_YM2-



CM19-56 Rear Observation

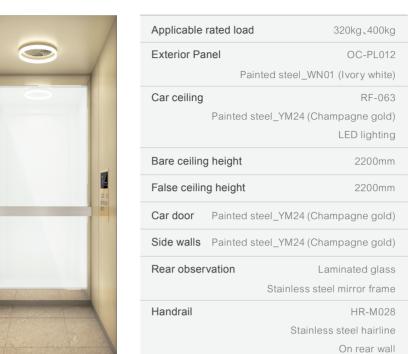

Standard

Car floor S-693 Vinyl flooring

Optional



Car ceiling RF-019 Painted steel\_YM24 (Champagne gold) LED lighting

CM19-57 3 Sides Observation

Standard



Applicable rated load	320kg,400kg
Exterior Panel	OC-TS016
Painted ste	eel_WN01 (Ivory white)
Car ceiling	RF-063
Painted steel_YN	M24 (Champagne gold)  LED lighting
Bare ceiling height	2200mm
False ceiling height	2200mm
Car door Painted steel_YM	M24 (Champagne gold)
Side walls Painted steel_YM	M24 (Champagne gold)
3 Sides Observation Stain	Laminated glass
Handrail	HR-M063 Stainless steel mirror Floor-mounted

Car floor S-693 Vinyl flooring

Optional



Car ceiling RF-019 Painted steel\_YM24 (Champagne gold) LED lighting

# **DECORATION DEVICE**

Car Operating Panel

Standard



#### **GOP-682**

Indicator

Monochrome LCD

Faceplate

Stainless steel mirror

Standard



"Door Close" Button (Without illumination)



"Door Open" Button (Without illumination)



"Floor" Button (Without illumination)



"Floor" Button (With illumination)

#### **UL-MW**

- Dimension
- Material
- Φ40mm
- Rim in stainless steel mirror
- Illumination

Symbol and periphery lighted up in white

Faceplate in circular stainless steel hairline Button with braille is available as option for maximum 2 digits.

#### Landing door / Jamb

Standard



Side opening



Center opening

### Landing door / Jamb

- Landing Door Painted steel\_WN01 (Ivory white)
- Landing Jamb

AS-1X narrow type: Painted steel\_WN01 (Ivory white)

#### Hall Operating Panel

Standard



#### HB-682A

- Faceplate Material Circular stainless steel hairline
- Mounting

Embedded type

# NOTE